



# Cable Ties

Conductor size  
conversion chart

AWG(MCM)	mm <sup>2</sup>	DIN/IEC mm <sup>1</sup>
30	0.05	
28	0.05	
26	0.13	
24	0.20	
22	0.32	
18	0.81	
16	1.32	1.5
14	2.08	
12	3.33	4
10	5.27	6
8	8.30	
6	13.30	
5	16.78	16
4	21.09	
3	26.57	25
2	33.94	35
1	42.22	
1/0	53.52	50
2/0	67.51	70
3/0 <sup>MCM</sup>	85.16	95
4/0	107.22	95
250	126.68	120
300	152.01	150
350	177.38	185
400	202.68	
500	253.35	240
600	304.02	300
700	354.69	
750	380.03	400
800	405.36	400
900	456.03	
1000	506.7	500
1250	633.06	630

**Roller Ball**  
• Ladder Coated / Uncoated

**CALTER** Stainless Steel Cable Ties offer a compact flame retardant cable fixing which will withstand 1000 F ( 538 °C ) and still hold the cable in place.


**CALTER** Cable Ties specially designed for light weight and toughness are easy to fix non-corrosive and durable for use in bundling cables, wires, hoses etc. And virtually in all indoor / outdoor applications with exposure to the risks of fire or corrosion.

**CALTER** range includes:


- Corrosion resistant cable ties of stainless steel grade 316/304
- Standard lengths ( other lengths on request )
- Coated and Uncoated
- Wide temperature range : -80 °C to +538 °C
- Width in 7mm and 4.6mm

**CALTER** cables conform to As3013

**Fire Resistance Test**  
According to AS 1530.4 - 1990

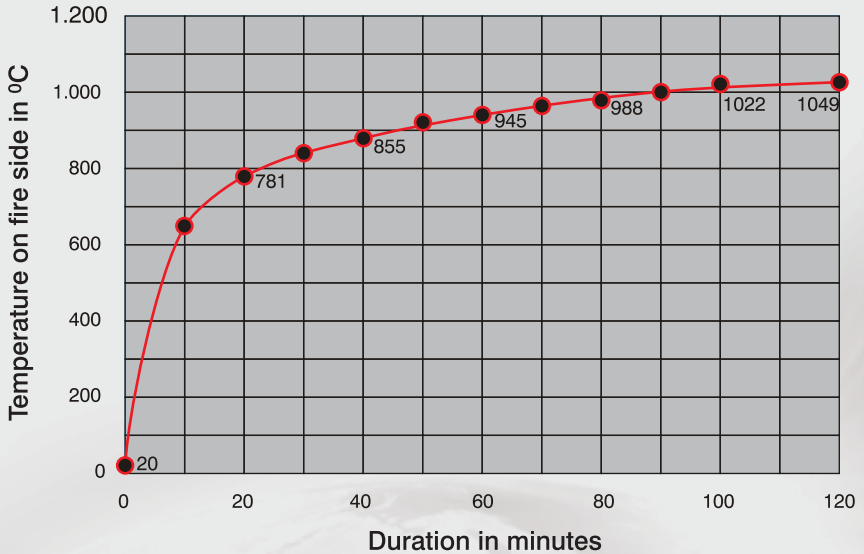

**Stainless Steel Cable Ties**  
Type: Roller Ball



**Stainless Steel Cable Ties**


Type : Roller ball

Material : Stainless steel (cross section)  
grade 316 & 304

Normal operating range : -80 °C to +538 °C  
Minimum loop tensile strength : 44.5 kg.

Sr. No.	Cat. No.	Length (mm)	Width (mm)
1	CRB100	100	4.6
2	CRB150	150	4.6
3	CRB200	200	4.6
4	CRB360	360	4.6
5	CRB520	520	4.6
6	CRB680	680	4.6
7	CRB840	840	4.6
8	CRB1000	1000	4.6

**Stainless Steel Cable Ties**  
Type: Ladder-Coated & Uncoated

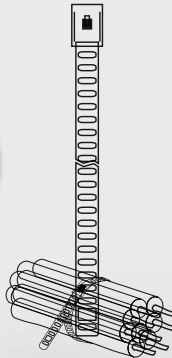

**Stainless Steel Cable Ties**

Type : Ladder coated & uncoated

Material : Stainless steel (cross section)  
grade 316 & 304

Minimum loop tensile strength : 32 kg.

Sr. No.	Cat. No.	Length (mm)	Width (mm)
1	CSL150	150	7
2	CSL200	200	7
3	CSL225	225	7
4	CSL250	250	7
5	CSL300	300	7
6	CSL360	360	7
7	CSL450	450	7
8	CSL600	600	7
9	CSL610	610	7
10	CSL750	750	7
11	CSL1000	1000	7